
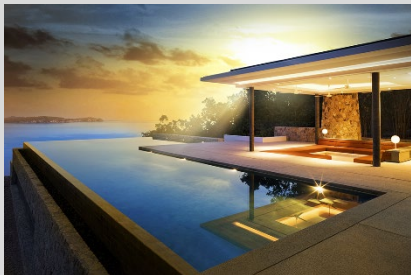







Halogen-free, radiation cross-linkable, highly flame-retardant insulation and sheathing compound for low voltage cables

<p>■ Compound class Insulation / Sheathing</p>	<p>■ Compound category </p>	<p>■ Flame retardant MDH</p>
<p>■ Standards EN 50363-5 EI 5 & EI 8 EN 50264 EI 105 & EI 110</p>	<p>■ Operating temperature [°C] -40 to 120</p>	<p>■ Oil resistance level ★</p>
<p>■ Typical applications <i>Long-term ageing resistance (20.000h/120°C).</i></p>		
 <p>Installation</p>	 <p>Rolling Stock, Rapid Transit, Railways</p>	
<p>■ Features</p>		
 Flame retardant	 Halogen-free	 Low smoke
 High temperature resistant		

PHYSICAL PROPERTIES

Physical properties	Unit	Typical value	Test method
Density*	g/cm ³	1.37	DIN EN ISO 1183-1A
Hardness*	Shore D	43	DIN ISO 48-4
Melt flow index (150°C; 21,6kg)	g/10min	4.0	DIN EN ISO 1133

MECHANICAL PROPERTIES **

Thermoplastic**	Unit	Typical value	Test method
Tensile strength	N/mm ²	> 10.0	IEC 60811-501
Elongation at break	%	> 350	IEC 60811-501
After crosslinking ***	Unit	Typical value	Test method
Tensile strength (150 kGy)	N/mm ²	≥ 12.0	IEC 60811-501
Elongation at break (150 kGy)	%	> 250	IEC 60811-501
After ageing in air oven 240h at 180°C ***	Unit	Typical value	Test method
Variation in tensile strength	%	+ 27.8	IEC 60811-401
Variation in elongation at break	%	- 23.8	IEC 60811-401
After ageing in air oven 672h at 155°C ***	Unit	Typical value	Test method
Variation in tensile strength	%	+ 32.2	IEC 60811-401
Variation in elongation at break	%	- 6.3	IEC 60811-401

THERMAL PROPERTIES ***

■ Hot set test at 200°C / 15min / 0,2 MPa (150 kGy)	Unit	Typical value	Test method
Elongation under load	%	20	IEC 60811-507
Residual elongation	%	1	IEC 60811-507
■ Hot set test at 250°C / 15min / 0,2 MPa (150 kGy)	Unit	Typical value	Test method
Elongation under load	%	28	IEC 60811-507
Residual elongation	%	8	IEC 60811-507
■ Heat tests (150 kGy)	Unit	Typical value	Test method
Hot pressure test: penetration 6h at 125°C	%	40	IEC 60811-508
■ Low temperature tests	Unit	Typical value	Test method
Elongation at break at -40°C (150kGy)	%	138	DIN EN ISO 527
Elongation at break at -50°C (150kGy)	%	108	DIN EN ISO 527

ELECTRICAL PROPERTIES*

■ Major electrical properties	Unit	Typical value	Test method
Volume resistivity (at 23°C)	Ω cm	≥ 10¹⁴	EN 60093
Volume resistivity (at 90°C)	Ω cm	≥ 10¹³	EN 60093

RESISTANCE***

■ Fluid IRM 903 168h at 70°C	Unit	Typical value	Test method
Residual tensile strength	N/mm ²	7.6	IEC 60811-404
Residual elongation at break	%	148	IEC 60811-404
■ 1 N Oxalic acid 168h at 23°C	Unit	Typical value	Test method
Variation in tensile strength	%	-13.2	IEC 60811-404
Variation in elongation at break	%	15.4	IEC 60811-404
■ 1 N NaOH 168h at 23°C	Unit	Typical value	Test method
Variation in tensile strength	%	-12.4	IEC 60811-404
Variation in elongation at break	%	14.1	IEC 60811-404

BURNING PROPERTIES *

■ Main burning properties	Unit	Typical value	Test method
LOI	%	31	ASTM D 2863 A
Temperature Index	°C	300	NES 715
■ Acid gas emission	Unit	Typical value	Test method
Corrosivity: pH (min.)	-	≥4.3	IEC 60754-2
Conductivity (max.)	µS/mm	≤10	IEC 60754-2

* pressed plaques, 155°C / 5 min.

** extruded tapes

*** crosslinked extruded tapes 150 kGy

PROCESSING GUIDE

■ **Extruder Type**


Standard HFFR extruders.

■ **Screw configuration**

Low compression screw with L/D of 20 to 25 and compression ratio of 1:1.2

■ **Temperature profile extruder**

The profile shown below may vary slightly depending on extruder type, head design & output.

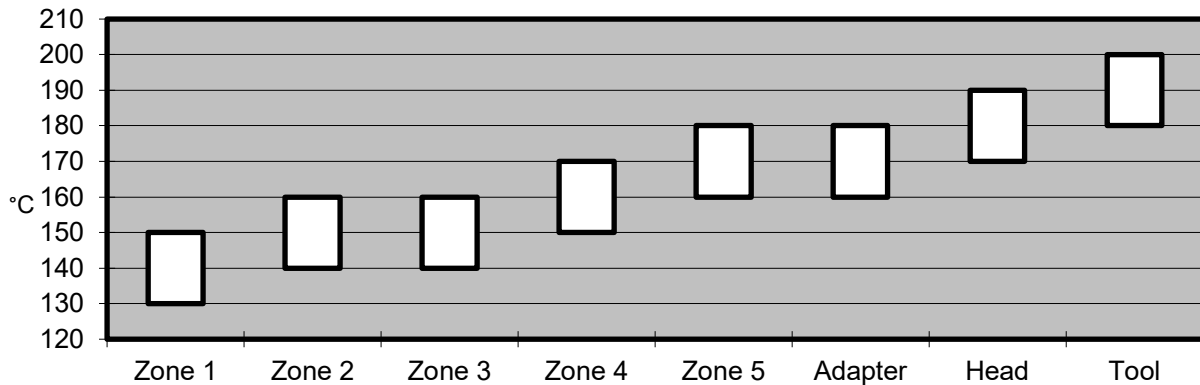

■ **Maximum mass temperature**

220°C

■ **Drying**

Predrying of Mecoline Compounds is normally not necessary provided the compound has been stored in sealed bags under cool (max. 30°C) and dry conditions.

If Mecoline Compounds are used from open bags, predrying 4–6h at a temperature of 60–70°C is recommended.

CROSSLINKING INFORMATION

■ **Recommended radiation dose**

100-150 kGy

STORAGE INFORMATION

■ **Form & packaging**

Pellets in sizes 2.8mm, Moisture-resistant bags (25kg) & octabins (alu-innerliner, max. 1250kg)

■ **Shelf life**

1 year after production

Note: The information given in this datasheet is believed to be accurate and reliable. However, no warranty, express or implied, or guarantee is given as to the suitability, accuracy, reliability or completeness of the information. This information does not hold us liable for damages or penalties resulting from following our suggestions or recommendations.